

FLAT EMBROIDERY MACHINE SERIES

刺绣机-平绣机系列

1 FIRST PART

- 裁片刺绣机系列
GARMENT PIECE EMBROIDERY MACHINE SERIES
- 面料刺绣机系列
FABRIC EMBROIDERY MACHINE SERIES
- 花边刺绣机系列
LACE EMBROIDERY MACHINE SERIES
- 家纺刺绣机系列
HOME TEXTILES EMBROIDERY MACHINE SERIES
- 成衣帽绣刺绣机系列
MULTI FUNCTION CAP/SHIRT EMBROIDERY MACHINE SERIES

GARMENT PIECE EMBROIDERY MACHINE SERIES

裁片刺绣机系列



新一代高速、高效率、高产值旗舰电脑刺绣机
A new generation of high-speed, high-efficiency, high-output flagship computer embroidery machine.

产品应用 APPLICATIONS

SINSIM 品牌服装裁片刺绣机系列广泛适用于各类服装裁片、章仔，工艺品刺绣，适用于多种厚薄面料精细刺绣产品的高品质刺绣需求，创造更高附加价值！

SINSIM BRAND garment piece embroidery machine series are widely used in all kinds of garment piece , embroidery shoulder board , art-ware ,suitable for high quality embroidery needs of various thick and thin fabrics , creating higher added value .

主要性能特征

MAIN PERFORMANCE CHARACTERISTICS


- 双凸轮双驱动、电子压脚机头结构可选，最高速度可达 1500 转 / 分；
 - 龙门铣高精度加工一体式机架结构；
 - 高性能工业级控制系统；
 - 高精度悬浮绣框结构和 C 型绣框结构可选；
 - 全方位立体注油方式；
 - 进口高速耐磨金刚石自动供油旋梭；
 - 伺服电机驱动，高强度进口皮带主传动；
 - 高精度定制齿轮驱动箱；
 - 高性能面线夹持结构；
 - 自主设计和加工挑线凸轮和压脚凸轮；
 - 高效步进电机静态剪线系统、高效丝杆剪线系统可选；
 - 机头跳跃电机系统；
 - 高速丝杆换色系统。
- Double Cam Double receptor, Electronics pressure foot Head structure option. Maximum speed reach to 1500rpm/min.
 - High Precision Integrated structure machine body processing by large Milling machine.
 - High proforma industrial grade electric control system.
 - High Precision suspension embroidery frame and C type Frame Structure option.
 - All-Round oil lubrication system.
 - Import high speed with abrasion material and self lubrication function Rotary Hook.
 - All servo motor driver, with High strength import belt .
 - High precision customization gear type driver box.
 - High performance upper thread holding system .
 - Self design and process take up thread cam and pressure foot cam.
 - High efficiency stepping motor and lead screw thread trimming system option.
 - Machine head with jump motor .
 - High speed lead screw color change system .

常规机器规格

GENERAL MACHINE SPECIFICATIONS

机型 Model	针数 Needles No.	头数 Head No.	头距 mm Head Interval	刺绣范围 mm Emb.Area	内框尺寸 mm Inner Frame Size	机器尺寸 mm Machine Size
SINSIM-GD1204	12	4	400	400*800	1820*840	3020*2157
SINSIM-GD1206	12	6	400	650*750	2890*990	4440*2482
SINSIM-GD1208	12	8	330	330*580	2700*630	3830*1717
SINSIM-GD1208	12	8	400	400*600	3260*645	4360*1757
SINSIM-GD1212	12	12	330	330*580	4000*620	5230*1717
SINSIM-GE912	9	12	400	500*750	4940*790	6220*2057
SINSIM-GD918	9	18	400	450*750	7290*790	8520*2057
SINSIM-GD1220	12	20	330	430*550	6740*590	8070*1657
SINSIM-GD1220	12	20	350	400*800	7290*840	8470*2157
SINSIM-GE1220	12	20	400	500*800	8140*850	9420*2157
SINSIM-GD922	9	22	330	660*750	7630*790	9070*2057
SINSIM-GD924	9	24	330	660*800	8290*840	9730*2177
SINSIM-GE1224	12	24	400	850*1100	10090*1140	12160*2757
SINSIM-GD926	9	26	330	450*650	8740*700	9970*1857

▼ SINSIM-GD920-400

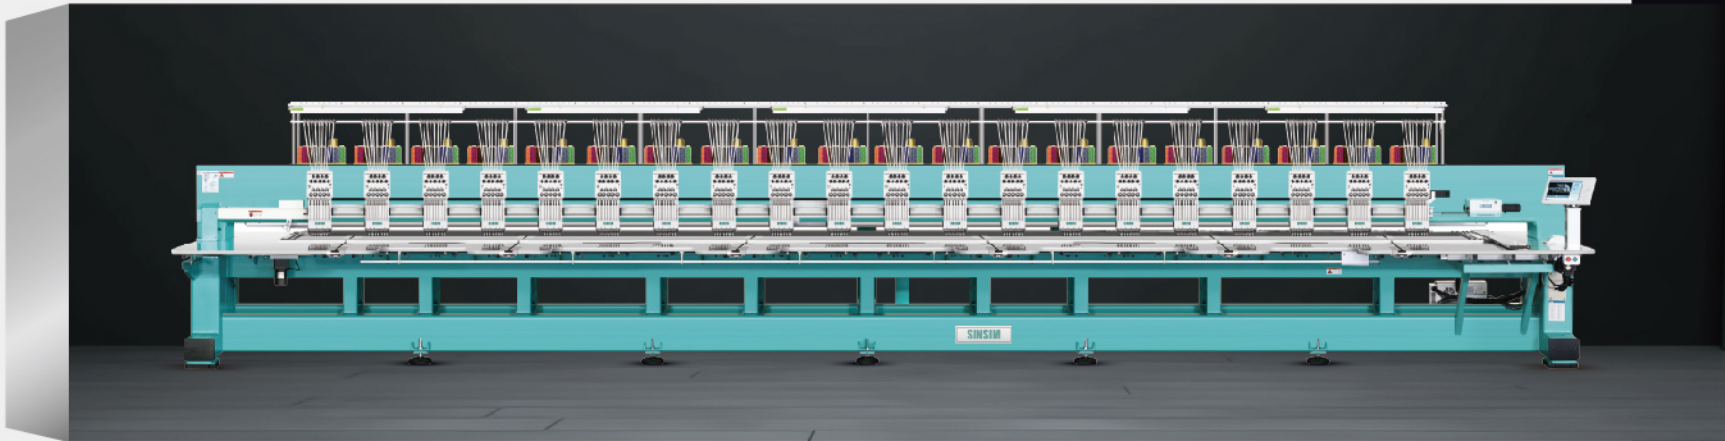

FABRIC EMBROIDERY MACHINE SERIES

面料刺绣机系列



适用于时尚最前沿的大牌服饰及创意设计，扩展更多种类的粗细线材，全面支持设计独特、高精细品质的刺绣需求。

Applicable to fashion-forward big-name clothing and creative designs. Expand more types of thick and thin embroidery thread. Fully support the needs of embroidery with unique design and high end design .

产品应用 APPLICATIONS

SINSIM 品牌面料刺绣机系列广泛应用在针织、梭织、棉麻、皮革、涤纶、纤维等面料上进行时装，服装、玩具、婚纱,家纺类高速高性能刺绣，有卓越表现。

SINSIM Brand Fabric series embroidery machine series are widely used in knitting, woven, cotton, leather, polyester, fiber and other fabrics for high speed and high performance embroidery of fashion ,clothing,toys,weeding dress,and home textiles with excellent performance .

主要性能特征

MAIN PERFORMANCE CHARACTERISTICS


- 双凸轮双驱动、双四件套机头结构可选，最高速度可达 1350 转 / 分；
- 龙门铣高精度加工一体式机架结构；
- 高性能工业级控制系统；
- 高精度悬浮绣框结构和 C 型绣框结构可选；
- 全方位立体注油方式；
- 伺服电机驱动，高强度进口皮带主传动；
- 高精度定制齿轮驱动箱；
- 高性能面线夹持结构；
- 根据机型配置多款高效剪线系统；
- 机头跳跃电机系统；
- 高速丝杆换色系统；
- 根据头距可选配不同附加装置。
- Double Cam Double receptor, Double crank head option. Maximum speed reach to 1350rpm/min.
- High Precision Integrated structure machine body processing by large Milling machine.
- High proforma industrial grade electric control system.
- High Precision suspension embroidery frame and C type Frame Structure option.
- All-Round oil lubrication system.
- All servo motor driver, with High strength import belt.
- High precision customization gear type driver box.
- High performance upper thread holding system.
- Variety efficient thread trimming systems according to the model.
- Thread trimming system option.
- Machine head with jump motor.
- High speed lead screw color change system.
- Different type optional device is available according head distance .

常规机器规格

GENERAL MACHINE SPECIFICATIONS

型号 Model	针数 Needles No.	头数 Head No.	头距 mm Head Interval	刺绣范围 mm Emb.Area	内框尺寸 mm Inner Frame Size	机器尺寸 mm Machine Size
SINSIM-FD904	9	4	330	750*1300	1850*1370	3500*3217
SINSIM-FD908	9	8	330	700*1330	3190*1370	4790*3217
SINSIM-FD912	9	12	600	700*900	7410*990	8890*2477
SINSIM-FD915	9	15	500	600*900	7710*990	9090*2477
SINSIM-FD918	9	18	400	450*800	7290*840	8520*2157
SINSIM-FD620	6	20	200	410*800	4250*840	5560*2177
SINSIM-FD921	9	21	300	700*1350	6740*1460	8290*3282
SINSIM-FC1223	12	23	400	850*1500	9860*1680	11900*3702
SINSIM-FC924	9	24	450	900*1330	11360*1370	13380*3217
SINSIM-FC924	9	24	330	750*1330	8490*1440	10060*3377
SINSIM-FC627	6	27	250	800*1500	7340*1610	9290*3582
SINSIM-FC1227	12	27	400	800*1500	11360*1680	13450*3702
SINSIM-FC928	9	28	330	750*1330	9770*1370	11470*3217
SINSIM-FC931	9	31	250	650*1500	8280*1680	9780*3702

▼ SINSIM-FD928-330

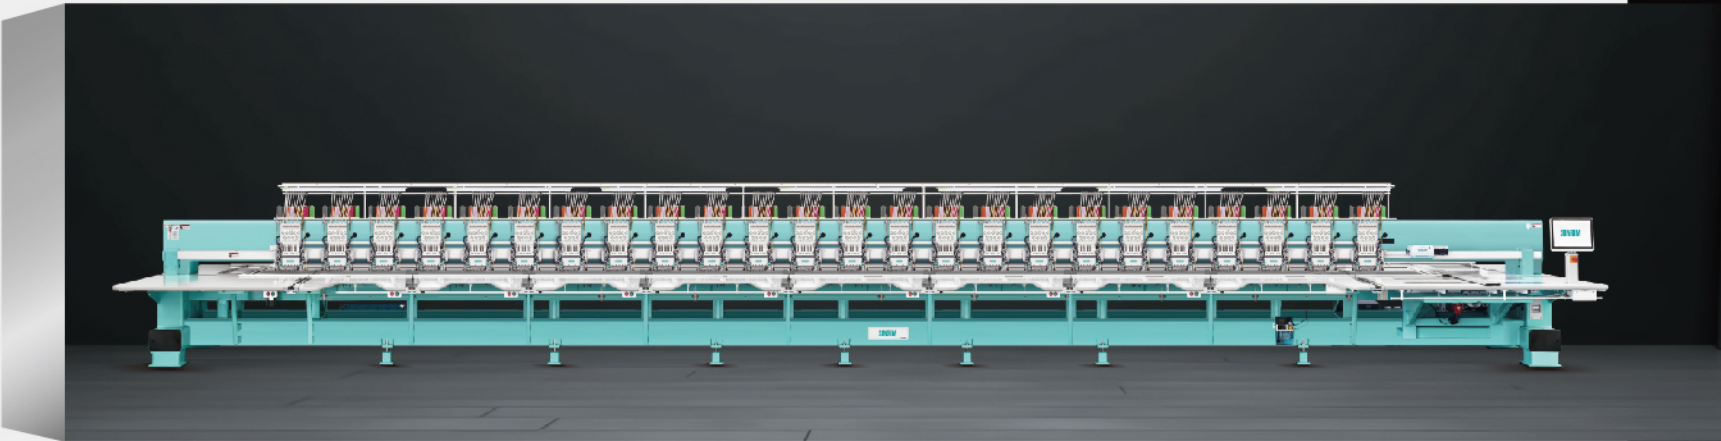

LACE EMBROIDERY MACHINE SERIES

花边刺绣机系列



主要性能特征

MAIN PERFORMANCE CHARACTERISTICS


- 自平衡、电子压脚、双凸轮双驱动结构机头可选；
 - 55/82.5/110/165 头距以及混合头距机型可选；
 - 10 码 /15 码 /20 码 / 可拼接等多款机型可选；
 - 龙门铣高精度加工机架结构；
 - 高性能工业级控制系统；
 - 高精度悬浮绣框结构和 C 型绣框结构可选；
 - 全方位立体注油方式；
 - 伺服电机驱动，高强度进口皮带主传动；
 - 高精度定制齿轮驱动箱；
 - 高性能面线夹持结构；
 - 高性能电机静态剪线；
 - 根据机型，采用双换色，双传动，双主轴结构；
 - 根据头距可选配不同附加装置。
- Self balance ,Double Cam Double receptor, Electronics pressure foot Head structure option. Maximum speed reach to 1500rpm/min.
 - 55/82.5/110/165mm head distance and mix head distance option.
 - 10 yard/15 yard/20 yard/combine model option .
 - High Precision Integrated structure machine body processing by large Milling machine.
 - High proforma industrial grade electric control system .
 - High Precision suspension embroidery frame and C type Frame Structure option.
 - All-Round oil lubrication system.
 - All servo motor driver, with High strength import belt .
 - High precision customization gear type driver box .
 - High performance upper thread holding system .
 - High efficient motorized thread trimming systems .
 - Double color change system ,double transmission shaft, double main shaft technology used on different model machine .
 - Different type optional device is available according head distance .

产品应用 APPLICATIONS

SINSIM 花边刺绣机系列广泛应用在玩具、手袋、鞋帽、童装、毛衣、内衣、床上用品、窗帘、毛巾、草席、布匹、家纺、牛仔服装等工艺品批量生产加工有卓越表现。

SINSIM super multi-head flat embroidery machine are widely used and for formed well in mass production of toys,handbags,baby clothes,sweaters, underwear,bedding, curtains, mats, fabrics,textiles, denim clothes etc.

迭代机型 ITERATION MACHINE MODEL

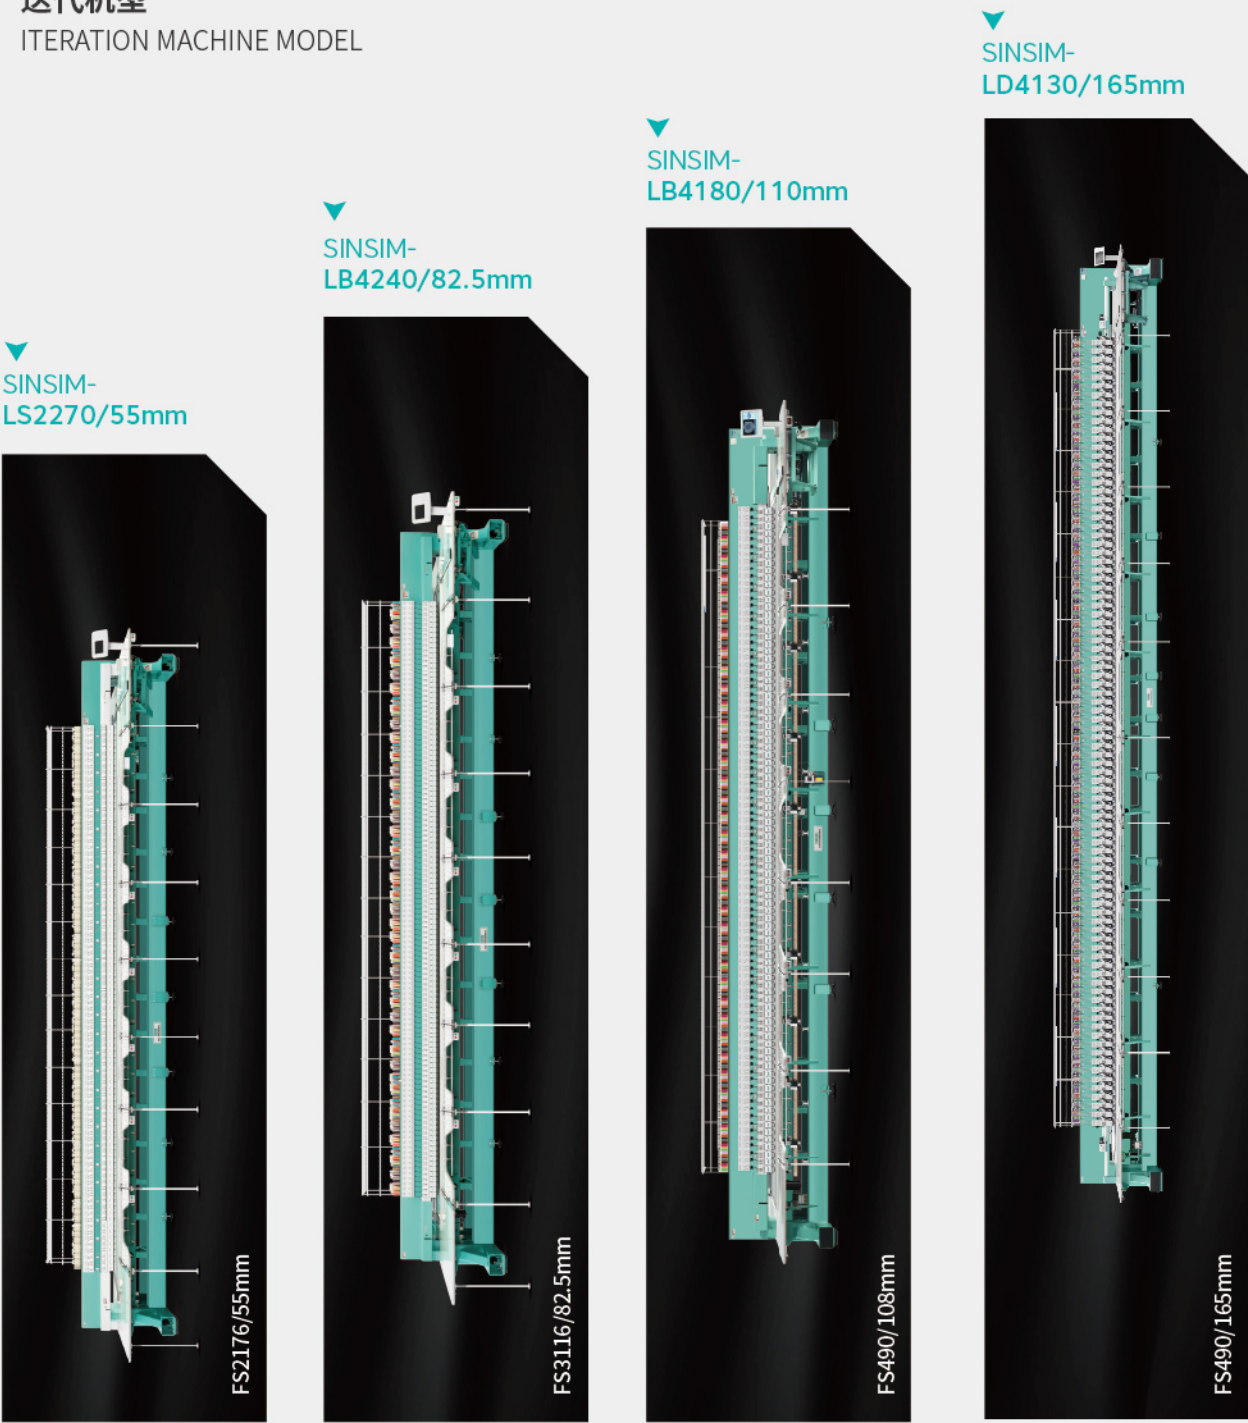

LACE EMBROIDERY MACHINE SERIES

花边刺绣机系列

常规机器规格

GENERAL MACHINE SPECIFICATIONS

型号 Model	针数 Needles No.	头数 Head No.	头距 mm Head Interval	刺绣范围 mm Emb.Area	内框尺寸 mm Inner Frame Size	机器尺寸 mm Machine Size
SINSIM-LS(4+2)270	4+2	270	55	700*1600	15535*1640	17385*4137
SINSIM-LB3120	3	120	82.5	600*1520	10457.5*1560	12007.5*3677
SINSIM-LB(3+4)180	3+4	180	82.5	600*1600	15407.5*1640	17157.5*3777
SINSIM-LB4140	4	140	82.5	600*1600	12007.5*1540	13487.5*3637
SINSIM-LB4240	4	240	82.5	600*1520	20375.5*1630	22347.5*3982
SINSIM-LB3172	3	172	85	650*1650	15225*1690	17025*4237
SINSIM-LB4(148+2)	4	148+2	110	600*1600	16810*1640	18600*4137
SINSIM-LB4132	4	132	110	750*1650	15200*1690	17100*4237
SINSIM-LS4190	4	190	110	700*1520	21530*1630	23620*3982
SINSIM-LS490	4	90	110	600*1600	10430*1640	11980*4057
SINSIM-LB4120	4	120	120	650*1500	15208*1540	17008*3937
SINSIM-LD4120	4	120	165	900*1600	20575*1640	22895*4077
SINSIM-LB4(130+2)	4	130+2	165	750*1600	22075*1710	24215*4077
SINSIM-LD690	6	90	165	750*1650	15475*1690	17375*4017
SINSIM-LC660	6	60	165	750*950	10525*990	12225*2577
SINSIM-LD666	6	66	240	750*1000	16390*1140	18290*2977

可扩展，大产能

Extensible, Large Capacity



超多头刺绣机实用于多种大小家纺用品设计，可扩展的刺绣面积具有灵活性，全面迎合市场实际所需，大大提高产能。

The super multi-head embroidery machine is useful in various textile designs and performs flexibly in embroidering range, which improves the productivity greatly and fulfills the market needs completely.

内置尖端技术

Internally Installed High Technology



内置尖端技术，先进技术提升你的刺绣创作，可加装自动换底线模组、自动夹框等自动化设备，突破性的提升产能效率。

Internally installed high technology, advanced technology can enhance your embroidery creation, and can be equipped with auto bobbin changer, automatic clamping frame and other automatic equipment, improve your embroidery production in breakthrough.

色彩更加丰富

More Colour




色彩更加丰富！低成本，高回报。

Make the embroidery more colorful! Low cost but high returns.

突破性的传动结构

Breakthrough transmission structure

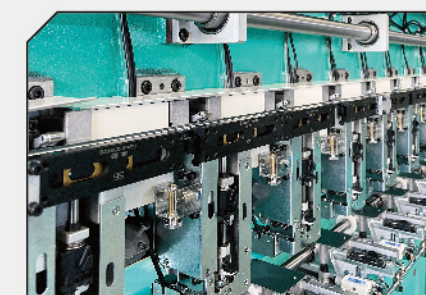


自平衡机头结构、梁前副轴多点传动，双换色，多电机，吊装驱动等结构应用，使设备稳定可靠。

Used new technology such as Self balance machine head structure, assistant main shaft with multi transmission, double color change system, multi servo motor and hanging driver system, make sure equipment running stable.

混合针数及混合头距可选

Mixed Needle Number Mixed Head Distance

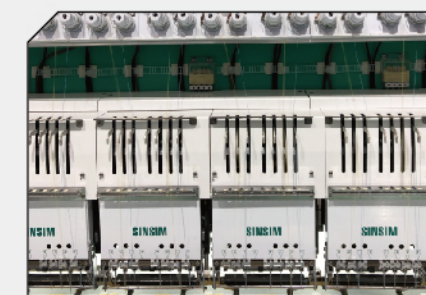


根据需求定制不同头距，不同针数，不同头数，以及可实现同一机型可工作不同头距和不同针数的个性化定制要求。

Different head distances, different number of needles, different number of heads can be customized according to the needs, and the individualized customization requirements can be realized for the same model that can work with different head distances and different needle numbers.

高速度，高效率

High Speed, High Efficient

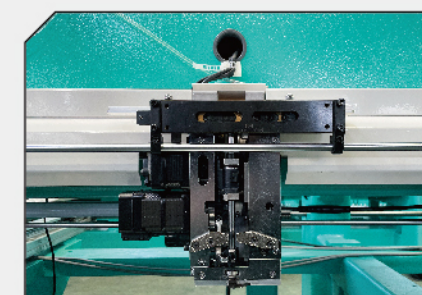

电子压脚，双四件套机型配置先进传动结构，机器最高转速实现每分钟1500转，低成本高效率不再是梦想。

Electronics pressure foot, double crank model machine with advance Transmission structure make machine running speed reach to 1500rpm, help you to realized the dream of low cost and high productivity.

HOME TEXTILES EMBROIDERY MACHINE SERIES

家纺刺绣机系列



主要性能特征

MAIN PERFORMANCE CHARACTERISTICS

- 双凸轮双驱动、双四件套机头结构可选，最高速度可达 1350 转 / 分；
 - 龙门铣高精度加工一体式机架结构；
 - 高性能工业级控制系统；
 - 高精度悬浮绣框结构和 C 型绣框结构可选；
 - 全方位立体注油方式；
 - 伺服电机驱动，高强度进口皮带主动；
 - 高精度定制齿轮驱动箱；
 - 高性能面线夹持结构；
 - 自主设计和加工挑线凸轮和压脚凸轮；
 - 电机静态剪线和丝杆剪线可选；
 - 根据机型配置多款高效剪线系统；
 - 机头跳跃电机系统；
 - 高速丝杆换色系统。
- Double Cam Double receptor, Double crank head option. Maximum speed reach to 1350rpm/min.
 - High Precision Integrated structure machine body processing by large Milling machine.
 - High proforma industrial grade electric control system.
 - High Precision suspension embroidery frame and C type Frame Structure option.
 - All-Round oil lubrication system.
 - All servo motor driver, with High strength import belt .
 - High precision customization gear type driver box.
 - High performance upper thread holding system.
 - Self design and process take up thread cam and pressure foot cam.
 - Variety efficient thread trimming systems according to the model.
 - Thread trimming system option.
 - Machine head with jump motor.
 - High speed lead screw color change system.

产品应用

APPLICATIONS

“SINSIM” 家纺系列刺绣机在床单、被套、枕套等床上用品上有卓越表现，同时可广泛应用到生活家居用品，同时满足时尚、保健等多功能个性化的定制刺绣。

SINSIM Home textiles embroidery machine series has excellent performance on bed sheets, quilt covers, pillowcases, and other bedding, It can be widely applied to daily household items, and at the same time meet the multi-functional personalized custom embroidery for fashion, health care and so on.

0.38秒 高速换色
0.38 second
high speed color
change

30色
单头可达
30 color
multi color
per head


伺服控制精度
0.01mm
0.01mm servo motor
control accuracy

常规机器规格

GENERAL MACHINE SPECIFICATIONS

型号 Model	针数 Needles No.	头数 Head No.	头距 mm Head Interval	刺绣范围 mm Emb.Area	内框尺寸 mm Inner Frame Size	机器尺寸 mm Machine Size
SINSIM-HC1515	15	15	1000	1100*1600	15140*1640	17660*3757
SINSIM-HC1516	15	16	800	900*1400	12940*1440	15060*3477
SINSIM-HC1517	15	17	900	1000*1600	15440*1640	17860*3757
SINSIM-HC1518	15	18	800	900*1350	14540*1390	16860*3257
SINSIM-HC1519	15	19	900	1000*1600	17240*1640	19660*3757
SINSIM-HC1520	15	20	1000	1100*1600	20140*1690	22660*3977
SINSIM-HC1522	15	22	900	10008*1600	19940*1690	22360*3977
SINSIM-HC1523	15	23	800	900*1600	18540*1640	20910*3877
SINSIM-HC1524	15	24	800	900*1500	19340*1540	21660*3557
SINSIM-HC1528	15	28	700	800*1300	19740*1340	22010*3277

▼ SINSIM-HD1515/800mm

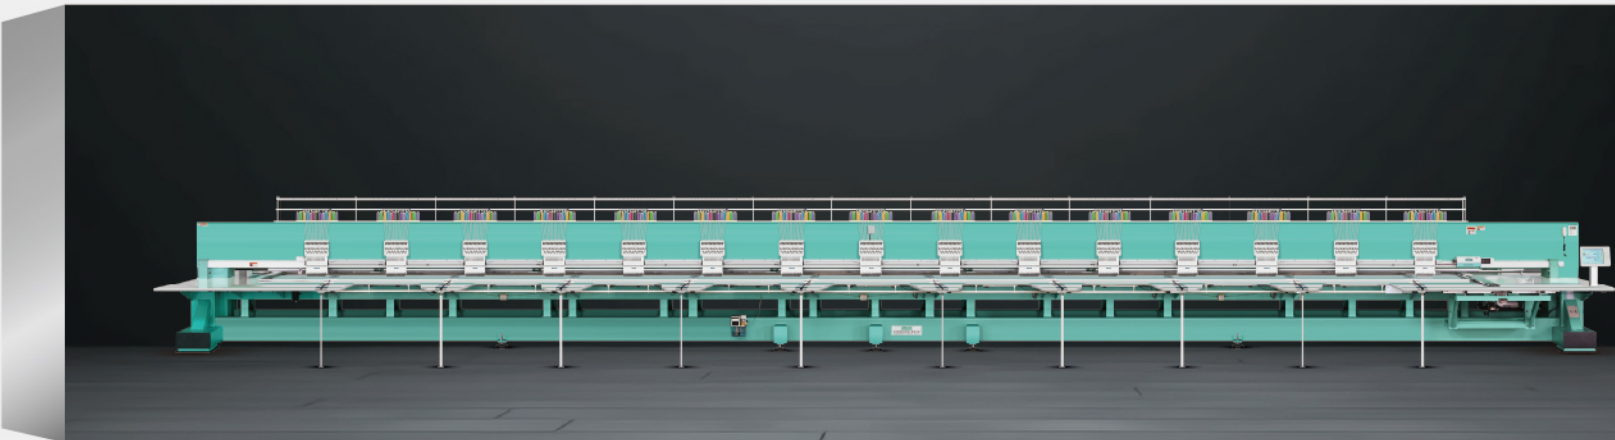

MULTI FUNCTION CAP /SHIRT EMBROIDERY MACHINE SERIES

成衣帽绣刺绣机系列



多元化的机型 Diversified Model

多元化的机款可让您透过刺绣展现无穷的创意意念

A diversified lineup of products enabling you to demonstrate your expression with embroidery.

多元化的应用 Diversified Application

多元化的应用提供广泛和多种产品，采用了丰富的可选设备

Diversified applications are available to a wide range and variety of products using a wealth of optional devices.

新技术的延伸 New technology extend

新款独立压脚机型的延伸，拓展刺绣的创意。

New type machine equipment indenpend pressure technology , extend more ideas for embroidery .

多元化的机型可展现无穷的创意意念, 充分满足家用和商用个性化刺绣需求。

Adiversified lineup of products enabling you to demonstrate your expression with embroidery, full satisfied personalized demand of home ues or commercial use.

主要性能特征

MAIN PERFORMANCE CHARACTERISTICS

- 同一台机器适用于平绣、帽绣、成衣绣、鞋子、箱包等多种应用；
- 根据不同尺寸花架在 T 恤衫，卫衣或者其他类型成衣上的不同刺绣；
- 轻量化设计且机架结构稳定；
- 270 度广角帽绣系统；
- 高分辨率真彩定制触摸屏；
- 附加附件使添加刺绣效果变得轻而易举，用亮片、雕孔和绳索、珠子装饰您的设计；
- 红外定位系统，内置 LED 照明；
- 多规格附件可选，满足所有刺绣应用的需求；
- 最高转速 1200rpm；
- 支持多国语言。
- Suitable for embroidery on flats, cap, finished garmentts , shoes, bags and more.
- Provide various size of the hoops make embroidery on the T-shirt, sweaters or other cloth.
- Lightweight design and stable structure .
- 270°wideangle cap system.
- High definition ture color 10inch LCD Touch screen.
- Attachment make hooping and adding embroidery effects a breeze, embellish your designs with sequin, boring and cording ,beads .
- Adopts red-light position determination system with built-in LED lighting.
- Numerous embroidery hoops and option equipment for a variety of embroidery needs.
- Maximum speed: 1200stitches per minute.
- Support multi-language such as Chinese, English, arabic, turkish, spanish, russian, portuguese, french, thai, german, italian, polish, iranian.

产品应用

APPLICATIONS

小型家用和商用刺绣机适用于时尚服装服饰店，个性化定制刺绣网店，家用DIY，学院机构教学，旅游门点，梦想创业者。广泛应用在成品帽子，成衣，以及其他个性化绣花需求。

Compact and commercial embroidery machine is suitable for fashion clothing stores, personalized embroidery online stores, family DIY, college institutional teaching. Dreamer enterpreurship. widely used in finished hats, finished garmentd and other personalise embroidery needs.



MULTI FUNCTION CAP /SHIRT EMBROIDERY MACHINE SERIES

成衣帽绣刺绣机系列

联网功能

NETWORKING FUNCTION




先进的网络技术,可以将多台绣花机同时联网操作,以建立灵活便捷的生产系统。联网后,所有机器可以同时刺绣同一个花版,或不同机器同时刺绣不同花版和不同绣品。

Using advanced network technology, users can link together as many machine as desired to create an extremely flecible pro-duction system , embroidery the same design on all of your machines at the same time or embroidery different designs on indi-vidual machines simultaneously.

成衣绣框

T-SHIRT HOOPS

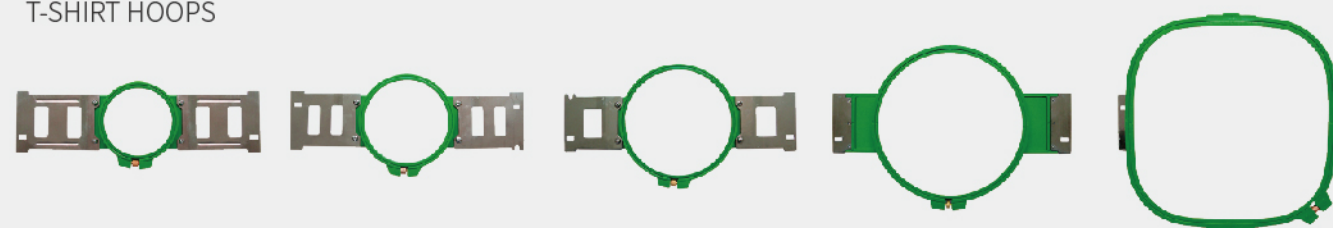

常规机器规格

GENERAL MACHINE SPECIFICATIONS

型号 Model	针数 / 头数 Needle/Heads	刺绣范围 mm Embroidery Area			机器尺寸 Machine Size(mm)	包装尺寸 Package Size(mm)
		平绣 Flat	帽绣 Cap	成衣绣 T-shirt		
PA	1501	350*200	260*65	360*160	780*760*1600	830*720*740
PB	1501	350*200	260*65	360*160	780*760*1600	830*720*740
PD	1201	500*350	260*65	270*270	1100*1160*1600	1000*950*1000
PD	1201	500*400	260*65	370*370	1220*1160*1600	1000*950*1000
PD	1201	800*500	260*65	370*370	1450*1750*1600	1180*1380*1000
PD	1201	1200*500	260*65	530*330	1450*2550*1600	1180*1480*1000
PD	1202	600*600*500	260*65	360*360	1950*1450*1600	2000*1450*1500
PR	1201	500*360	260*65	270*270	1120*1160*1600	1000*950*1000
PE	1201	500*360	260*65	270*270	1080*1160*1600	1000*950*1000
PL	1201	600*500	260*65	370*370	1450*1350*1600	1180*1280*1000
PL	1201	800*500	260*65	370*370	1450*1750*1600	1180*1280*1000
PL	1201	1200*500	260*65	530*330	1450*2550*1600	1180*1480*1000
PU	1204	400*450*400	260*65	360*160	3390*1300*1600	3600*1130*1500
PU	1208	400*450*400	260*65	360*160	5190*1300*1600	5300*1130*1500

可选附加装置

OPTION ADDITIONAL DEVICE

刺绣机联网管理功能 Network Management Function

简易绳绣装置 Easy Cording Device

金片绣装置 Sequin Device

简易毛巾装置 Simple Towel Device

雕孔刀 boring Knife

独立压脚（可选）Independent Pressure Foot

激光切割装置 Laser cutting Device

珠子绣装置 Bead Device /single Color /double Color /triple color

帽绣装置

CAP ATTACHMENTS INCLUDED



帽框 Hoop Station



帽座 Cap Ring



帽绣驱动 Cap Driver

SPECIAL EMBROIDERY MACHINE SERIES

刺绣机-特种机系列

2 SECOND PART



烫片机系列
AUTOMATIC SEQUIN PUNCH PRESS MACHINE SERIES

盘带/绳绣刺绣机系列
TAPPING / COILING EMBROIDERY MACHINE SERIES

毛巾/链式刺绣机系列
CHENILLE/CHAIN STITCH EMBROIDERY MACHINE SERIES

植绒刺绣机系列
TUFTING STITCH EMBROIDERY MACHINE SERIES

绗绣机系列
QULTING EMBROIDERY MACHINE SERIES

KOBAN

HIROSE

DESHENG

KOBEST

ORGAN

GROZBECKET

DOTEC

SCHMETZ

AUTOMATIC SEQUIN PUNCH PRESS MACHINE SERIES

烫片机系列



主要性能特征




MAIN PERFORMANCE CHARACTERISTICS

- **电控系统** : 工业级 ARM 架构 A8 处理器 ; 全触摸真彩工业显示屏 ; 存储容量达 1 亿针 ; 片盘无片、卡片检测 , 具有自动补片功能 , 减少次品 ;
- **换色结构** : 采用闭环电机和高精度丝杆搭配设计 , 换色精度高、速度快 ;
- **机头结构** : 平衡机头结构 , 减少震动。定位销安装 , 保证安装精度 ;
- **铰头组件** :
 - (1) 模块化设计 , 可任意切换尺寸组合 ;
 - (2) 独立电机送片 , 根据规格送片 , 距离可控 ;
 - (3) 双重导向 , 同心度高 , 铰头使用寿命长 ;
 - (4) 铰头组件精度高。
- **贴片绣框** :
 - (1) 高精度轻型悬浮独立贴片框架 , 落针高度稳定一致 ;
 - (2) 气动连接脱卸 , 脱卸方便 ;
 - (3) 采用静电膜设计 : 高粘度 , 高精度。贴纸切换方便 ;
 - (4) 红外线十字定位标记 , 人性化设计方便操作 , 减少误差。
- **Electric control system**: industrial grade arm architecture A8 processor; full touch true color industrial display screen; storage capacity of 100 million needles;
- **Color-changing structure**: high precision and fast color-changing with closed-loop motor and ball screw;
- **Head structure**: balanced head structure to reduce vibration. Positioning pin available to ensure installation accuracy;
- **Punch components**:
 - (1) Modular design, any combinations of sizes can be switched;
 - (2) Independent motor to feed sequins, specifications accordance and distance control;
 - (3) Double guide and high concentricity, also long service life of the punch press heads;
 - (4) High precision of the punch head assembly.
- **Embroidery frame**:
 - (1) High-precision lightweight independent suspension frames, stable and consistent height of the needle drop;
 - (2) Pneumatic connection for easy unloading;
 - (3) Electrostatic film design: high viscosity and precision. Easy to switch between stickers;
 - (4) Infrared cross-positioning marker, humanized design for easy operation and error reduction.

产品应用 APPLICATIONS


广泛应用在服装、鞋面、箱包、家纺及工艺品等行业。可结合刺绣、激光、烫钻等工艺, 丰富个性化设计。

Widely used in clothing, footwear, bags, bedding and handicrafts industries. While combined with processes of embroidery, laser and sequin punch press, it enriches personalized design.

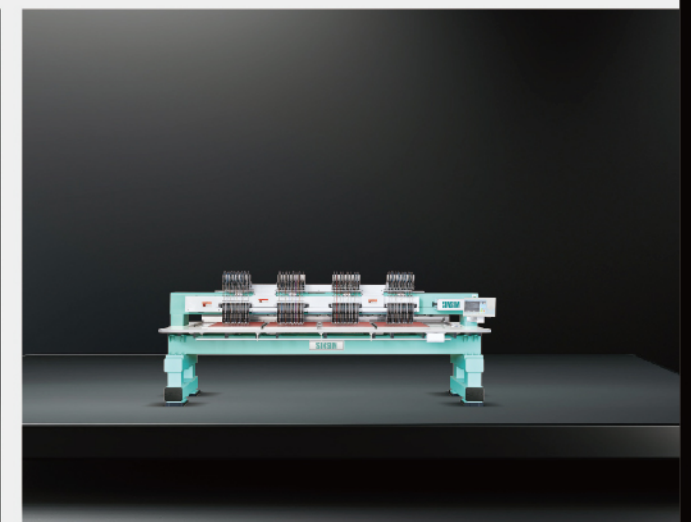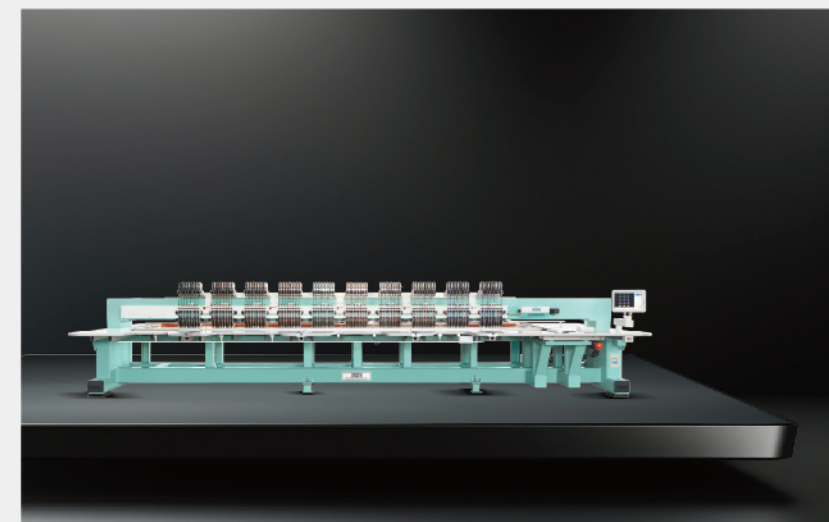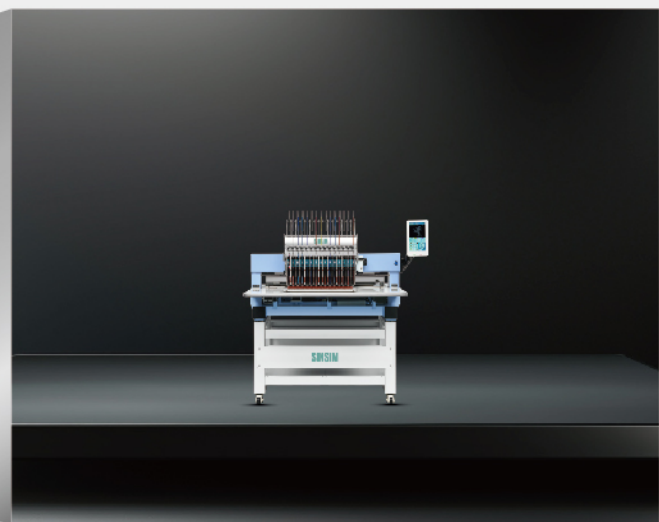

AUTOMATIC SEQUIN PUNCH PRESS MACHINE SERIES

烫片机系列

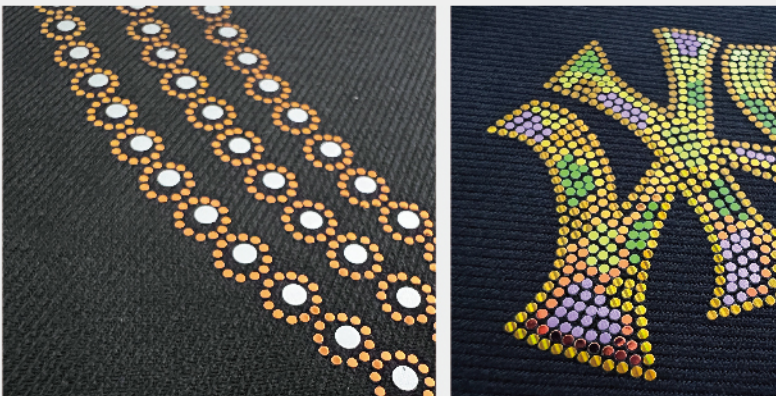

色彩丰富 形状多样

Rich colors , Various Shapes



色彩丰富：单头可达 12 色，多头 8 色
形状多样：最小尺寸可达 0.4mm, 其他可选尺寸包括 0.6/0.8/1.0/1.2/1.5/2.0/3.0/4.0/5.0 及异形膜片。

Rich colors : single head reach to 12 colors, multi head with 8 color .
Various shapes: Minimum size 0.4mm , other size 0.6/0.8/1.0/1.2/1.5/2.0/3.0/4.0/5.0 and special shaped option.

套色精度高

Color Overlap Accuracy



送片精度高，间距可达 0.1mm, 套色精度可达 0.05mm, 不易漏片翻片，满足高品质设计要求。

High precision sequin feeding , sequin gap reach to 0.1mm, color overlap accuracy, minimum gap reach to 0.05mm, not easy missing sequin and turn over sequin.

增值服务

Value-added Services

提供一站式产品解决方案，免费制版培训、供应环保片材及烫片辅助设备。

One-stop product solutions provided, including free design-making training and eco-friendly sequins supply also auxiliary equipments accessible.

常规机器规格

GENERAL MACHINE SPECIFICATIONS

型号 Model	色数 / 针数 Color	机头数 Head	机头距离 mm Head interval	框架范围 mm Frame Area	贴片行程 mm Work area	机器尺寸 mm Machine Size	标准镜头规格 mm Standard Size
SINSIM-ASP1201	12	1	0	510*450	460*410	1210*1020	0.8*3+1.0*2+1.2*2+1.5*2+2.0*2+3.0*1
SINSIM-ASP804	8	4	600	530*590	490*550	3450*1417	0.8*2+1.0*2+1.2*2+1.5*1+2.0*1
SINSIM-ASP810	8	10	550	600*750	600*650	7950*2057	0.8*2+1.0*2+1.2*2+1.5*1+2.0*1

高速铊片，稳定耐用

High speed sequin punching , stable and durable.



专用工业级定制电控，工作速度可达 1000 转 / 分钟，稳定耐用。

Dedicated industrial grade custom electronic control, work speed up to 1000rpm , stable and durable.

独家韩国技术

Exclusive Korean Technology



独家韩国技术，模块化镜头组件设计，铊针采用特殊耐磨材质。

Exclusive Korean technology , modular design for punch components, and punch needle use special anti-friction material .

人性化设计 功能丰富

Humanized design with multi function




缺片检测功能，一键穿片，出片，主动拉片，人性化余料收集系统。

Sequin missing detection function , threading sequin and output sequin by one button , film pulling automatic , humanized residual material collection system .

TAPPING / COILING EMBROIDERY MACHINE SERIES

盘带/绳绣刺绣机系列

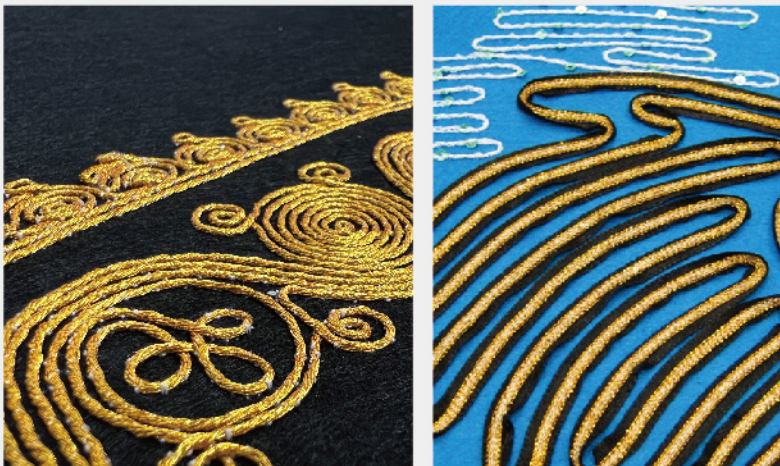

集平绣、亮片、盘带等多种绣法为一体, 多元化辅料选择, 创造更丰富刺绣款式。

It integrates many embroidery methods such as flat embroidery , sequin and cording , etc. thus making embroidery methods flexible and variable.

常规机器规格

GENERAL MACHINE SPECIFICATIONS

型号 Model	针数 Needles No.	头数 Head No.	头距 mm Head interval	刺绣范围 mm Emb.Area	内框尺寸 mm Inner Frame Size	机器尺寸 mm Machine Size
SINSIM-MC902	9	2	600	700*900	1840*940	3770*2357
SINSIM-MC904	9	4	600	700*900	3040*940	5070*2357
SINSIM-MC906	9	6	600	700*900	4240*940	6270*2357
SINSIM-MC608	6	8	500	600*900	4350*940	6420*2357
SINSIM-MC910	9	10	600	700*1000	6400*1040	8670*2557
SINSIM-MC612	6	12	500	600*900	6450*940	8420*2357
SINSIM-MC912	9	12	600	700*1000	7600*1040	9870*2557
SINSIM-MC918	9	18	800	1200*1600	15190*1590	17810*3657
SINSIM-MC436	4	36	330	1150*1600	12905*1640	15275*3757
SINSIM-MC360	3	60	330	950*1520	20625*1560	22995*3597

产品应用

APPLICATIONS

此系列机器可集合平绣，缠绕绣、绳绣、扁带绣、珠片绣等功能，适合做时装、婚纱、童装、家纺、针织、梭织、棉麻、皮革、涤纶、纤维等面料的高端品牌刺绣。


Tapping/coiling embroidery machine series machine are available to combines flat embroidery, coiling embroidery, cording embroidery , tapping embroidery and sequin embroidery function . This model is suitable for fashions, lace, children's garments, home textiles, knitting, tatting, cotton, leather, polyester, fiber, fabrics, top brand embroidery and so on.

主要性能特征

MAIN PERFORMANCE CHARACTERISTICS

- 平绣机头双凸轮双驱动、双四件套机头结构可选；
- 龙门铣高精度加工一体式机架结构；
- 高性能工业级控制系统；
- 高精度悬浮绣框结构和 C 型绣框结构可选；
- 全方位立体注油方式；
- 伺服电机驱动，高强度进口皮带传动；
- 高精度定制齿轮驱动箱；
- 高性能面线夹持结构；
- 高速丝杆换色系统；
- 根据头距可选配不同附加装置及加装自动剪绳功能；
- 通过附件和电脑参数的选择，可实现缠绕绣，扁带绣，绳绣，羽状绣、锯齿绣等多种刺绣效果；
- 盘带机头可绣作不同规格绳子和带子材料；
- 多倍容量绕线轮和多色绳带绣功能可选。
- Flat Head can choose Double Cam Double receptor, Double crank head structure.
- High Precision Integrated structure machine body processing by large Milling machine.
- High proforma industrial grade electric control system.
- High Precision suspension embroidery frame and C type Frame Structure option .
- All-Round oil lubrication system .
- All servo motor driver, with High strength import belt.
- High precision customization gear type driver box.
- High performance upper thread holding system.
- High speed lead screw color change system.
- Different type optional device is available according head distance and automatic cording and tapping cutter system is available.
- Many embroidery effects such as cording, tapping, frill, zig-zag sewing can be realized by choosing attachments and computer parameters.
- Multi type cording and tapping material is available.
- Multiplicity capacity roll wheel and multi color cording or tapping function is option .

▼ SINSIM-MC612/500

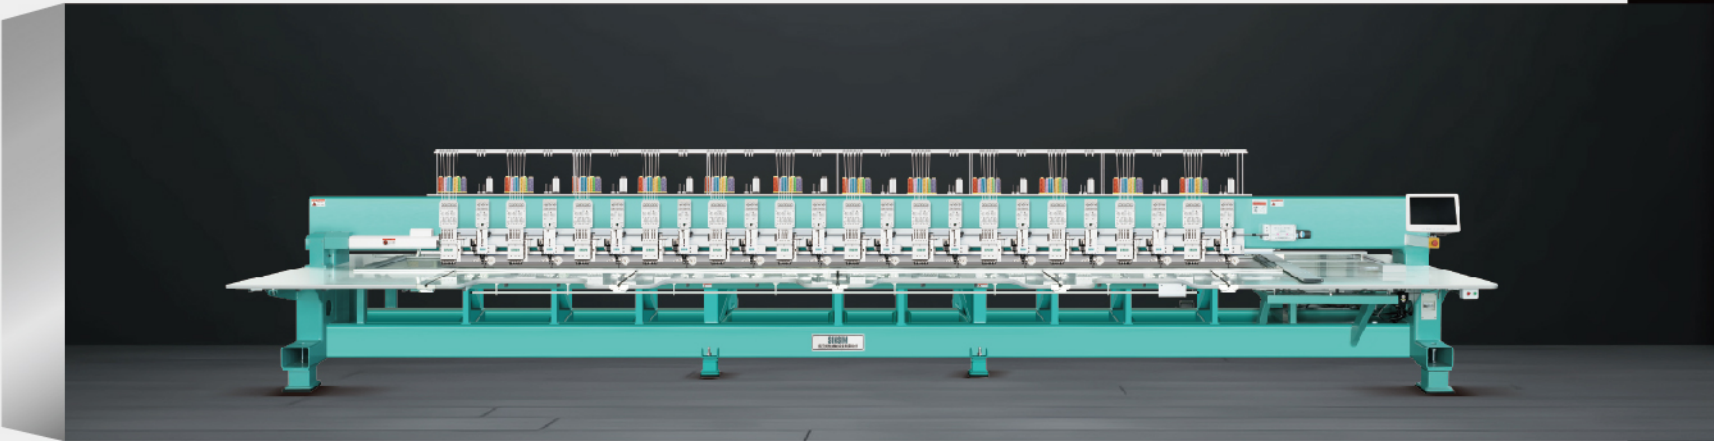

CHENILLE/CHAIN
STITCH EMBROIDERY
MACHINE SERIES

毛巾/链式刺绣机系列



主要性能特征

MAIN PERFORMANCE CHARACTERISTICS

- 平绣机头双凸轮双驱动、双四件套机头结构可选；
 - 龙门铣高精度加工一体式机架结构；
 - 高性能工业级控制系统；
 - 高精度悬浮绣框结构和 C 型绣框结构可选；
 - 全方位立体注油方式；
 - 伺服电机驱动，高强度进口皮带传动；
 - 高精度定制齿轮驱动箱；
 - 高性能面线夹持结构；
 - 根据头距可选配金片，绳绣，珠子绣，激光切割，雕孔等附加装置；
 - 根据应用场景灵活选配内置和外置凸轮毛巾机头；
 - 最多 12 种毛巾 / 链式颜色，可灵活切换；
 - 配备温控风冷系统，毛巾梭床自动清理结构。
- Flat Head can choose Double Cam Double receptor, Double crank head structure.
 - High Precision Integrated structure machine body processing by large Milling machine.
 - High proforma industrial grade electric control system.
 - High Precision suspension embroidery frame and C type Frame Structure option.
 - All-Round oil lubrication system .
 - All servo motor driver, with High strength import belt.
 - High precision customization gear type driver box .
 - High performance upper thread holding system .
 - Sequin,cording,beads, laser cutting , boring device enable you to choose flexibly according head distance .
 - Flexible selection of inner cam and external cam of towel heads according to application scenarios .
 - Automatic change of 12 colors of chenille head.
 - Equipped with a temperature-controlled air-cooling system and automatic cleaning structure.

一机多能，可在同一幅绣品上完成各种传统刺绣手法，并添加毛巾针迹、链式针迹及带绣、盘绣效果，多种设计及素材融为一体。

A mixed machine can use a variety of traditional techniques in one piece of embroidery with additional effect of towel stitch, chain stitch and taping embroidery and the mix of designs and materials.

产品应用

APPLICATIONS

毛巾绣/链式绣以其立体感强，层次丰富、色彩绚丽等特点，在儿童服装、家居装饰、女士鞋帽、等领域具有广阔的发展前景，广泛应用在桌布、被面、童装、针织套衫、徽章、毛毯、丝绸、亚麻布纺织品等进行刺绣。


The looping/chain stitch embroidery had broad prospects of development in fields of children 's wear, home decoration,ladies shoes with advantages of strong 3D effect,rich gradation and brilliant colors,it widely applied in embroideries of table cloth,napkin,bed over,pillowcase, children 's wear, knitted over pull, badge, blanket, lady 's shirt, cap,furs, silk,and linen etc.

常规机器规格

GENERAL MACHINE SPECIFICATIONS

机器型号 Model	平绣色数 Needles No. (Flat)	毛巾色数 Needles No. (chenille)	平绣头数 Heads No. (Flat)	毛巾头数 Head No. (Chenille)	头距 mm Head interval	刺绣范围 mm Emb.Area	内框尺寸 mm Inner Frame Size	机器尺寸 mm Machine Size
SINSIM-MT(9+6)(4+4)	9	6	4	4	550	110*900	3240*940	5720*2357
SINSIM-T612	0	6	0	12	500	550*900	6130*940	7650*2357
SINSIM-MT(9+6)(12+12)	9	6	12	12	600	1200*1500	7880*1660	10160*3797
SINSIM-T614	0	6	0	14	840	840*1750	11840*1790	13460*4057
SINSIM-T615	0	6	0	15	500	550*1650	7630*1690	9150*3857
SINSIM-MT(6+6)(15+15)	6	6	15	15	500	110*1300	8410*1340	10840*3157
SINSIM-MT(12+9)(20+20)	12	9	20	20	500	600*900	10410*940	12780*2377
SINSIM-T624	0	6	0	24	450	600*1350	11030*1390	12580*3257
SINSIM-MT(9+9)(24+24)	9	9	24	24	500	1000*900	12810*940	15280*2357
SINSIM-MT(9+6)(26+26)	9	6	26	26	450	750*850	12090*900	14160*2277
SINSIM-T628	0	6	0	28	330	750*1330	9740*1370	11690*3217
SINSIM-T632	0	6	0	32	300	650*1500	10030*1540	11780*3557
SINSIM-MT(6+4)(32+32)	6	4	32	32	330	700*1600	11260*1640	13380*3777
SINSIM-T639	0	6	0	39	240	750*1750	9950*1790	11800*4027

▼ SINSIM-MT(12+6)(12+12)/600

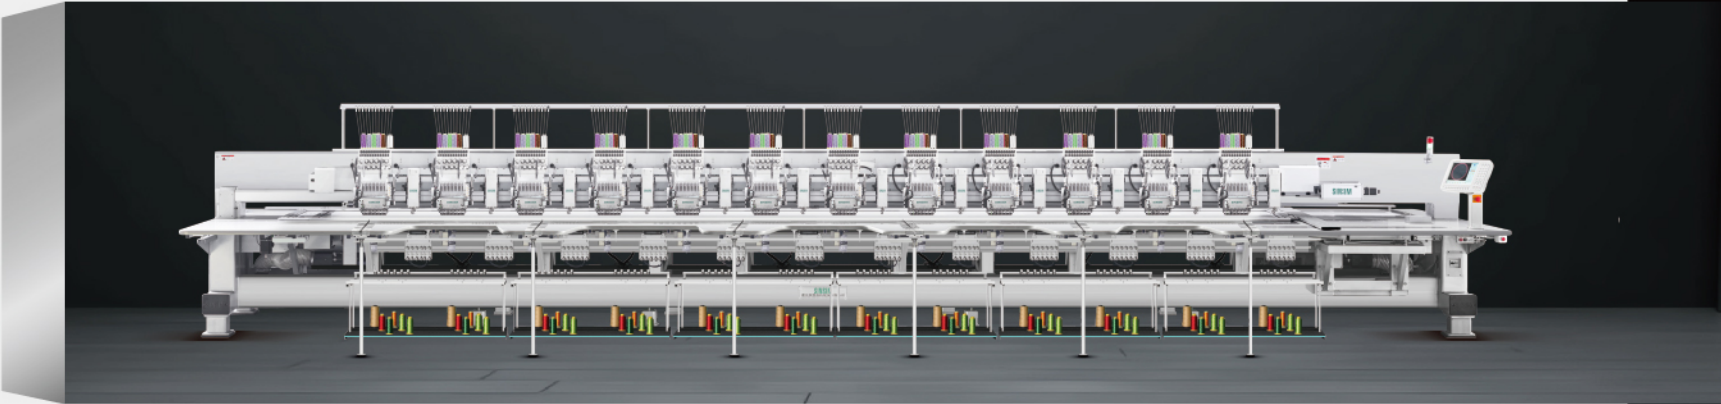

TUFTING STITCH EMBROIDERY MACHINE SERIES

植绒刺绣机系列



立体 清晰
3D
Clear

柔软 坚挺
Soft
Textural

牢固 精美
Tight
exquisite

简单 精准
Simple
Precision

低噪 高速
Low
High

产品应用

APPLICATIONS

平绣+植绒绣二合一混合绣花机是一款全自动转换植绒绣和平绣的特种绣花机。把植绒绣和平绣两种工艺完美结合，可适用于服装，家纺，工艺品等各种领域。


Mixed tuft embroidery combined is a special embroidery machine which can automatically transform tuft embroidery and normal embroidery . combined two kinds of embroidery craft in perfectly. applicable to all kinds of clothing , home textiles, handicrafts and other fields.

主要性能特征

MAIN PERFORMANCE CHARACTERISTICS

- 01** 根据花版和产品需求设计出长度不同的 3 维形状，使绣线挺立，凸显清晰图案。
According to the patterns and products, can create to have 3 dimensional designs via different yarns loop strands or cut strands reserved from the surface, flatness and straightness of each yarn show the vivid graphic.
- 02** 绣品柔中带刚，质感坚挺，手感柔软细腻，富有弹性，耐水洗，耐揉压。
Tufting Stitch embroidery gives the felling of softness and exquisiteness but with rigidity, also flexible, wash-resistant and rub-resistant.
- 03** 新工艺加持，绣品牢固不脱落，通过绣线与面料结合，无限创意呈精美效果。
With new technology , tufting embroidery is provided with a matchless tightness and will not fall off . through the colorful thread and perfectly integration of each threads and fabric, designer idea can be expressed effectively with vivid graphic.
- 04** 每个机头独立的电机和电控来完成，机器结构简单大方，保证刺绣的精准度和稳定性。
each head is accomplished by an independent motor and electric control. Machine structure is simple and generous. To ensure that the accuracy and stable of embroidery .
- 05** 下轴机械传动无需凸轮和齿轮，机器噪音低，耐磨损，速度高，最高转速 1200 转 / 分钟。
Without cam and gear in lower shaft mechanical driver. Low noise wear resistance and high speed maximum speed is up to 1200rpm .

▼ MF(12+9)(6+6) /600

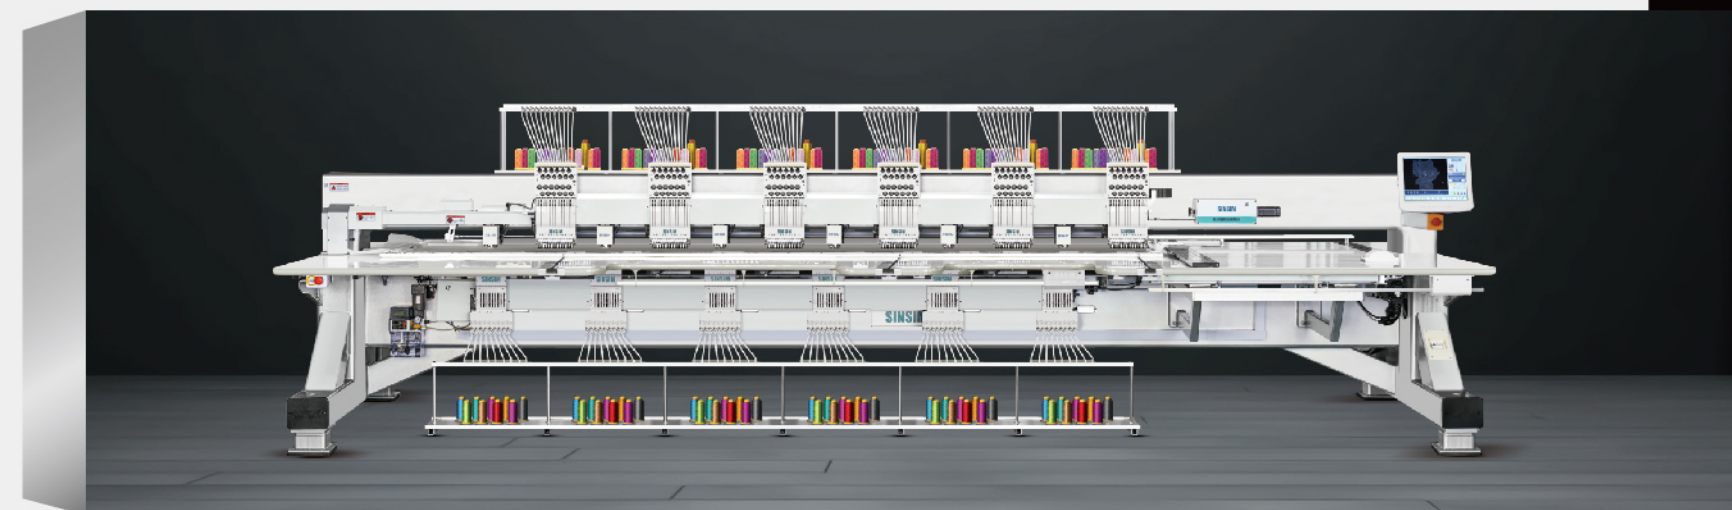

QULTING EMBROIDERY MACHINE SERIES

绗绣机系列



产品应用

APPLICATIONS

高速绗绣机通过自动送料，自动卷布装置可在有不同的面料上实现无拼接循环面料加工。广泛用于家纺、家居、服装、箱包，手袋，鞋帽、汽车、工艺品等行业。

Through automatic fabric feeding and material receiving device, High speed quilting embroidery machine can make roll to roll embroidery on various of fabric without joint. Suitable for home textile, household ,garment, bags, bags, shoes and cap , car and car decorative product.

主要性能特征

MAIN PERFORMANCE CHARACTERISTICS

01 龙门铣高精度加工一体式机架, 确保高速运行时设备平稳。

High Precision Integrated structure machine body processing by large Milling machine , make sure the machine running stably with high speed.

02 高速双凸轮双驱动绣花机头, 全伺服电机实现精准控制, 实现高速精准刺绣。

Double cam double lever high speed embroidery Machine heads with all servo motor driver , make high speed and precision embroidery.

03 X方向采用直线导轨及丝杆驱动。移动精度高，绣品效果佳。

X direction driving movement is driven by linear guideway and lead screw ,make high precision Movement and high quality embroidery .

04 缝制针迹在5mm以内, 绗缝速度每分钟900针不降速。

Quilting speed can maintain 900RPM without decreasing when stitch step is within 5mm.

05 同步传动罗拉结构, 实现Y向连续刺绣, 厚薄材料无需调节罗拉, 确保产品缝制精度。

The unique transmission structure ensures the stable working of the roller when the machine runs with high speed.

06 独特传动结构, 保证设备高速运转时滚筒平稳运行。

Synchronized driving structure roller system can guarantee the product quilting precision without adjusting the rollers while quilting the materials with various thicknesses.

07 高性能自动剪线和换色功能, 提高绣品质量。

High performance automatically thread trimming and color changing function to guarantee embroidery quality .

08 可选装置：自动卷料及自动送棉装置、金片装置，简易绳绣装置，珠子装置、自动换底线装置，激光切割装置。

Option Device : Automatic fabric feeding, material receiving, deviation correction functions.Sequin device, easy cording device, beads device, automatic bobbing changer device , laser cutting device .

09 根据应用场景可选配头数, 针数, 刺绣范围。

According to the application scene, the number of heads, number of needles, and the embroidery area is available to customized .



ADDITIONAL
DEVICE
附加装置

3
THIRD PART

- 金片绣装置
SEQUIN DEVICE
- 简易绳绣装置
EASY CORDING DEVICE
- 珠子绣装置
BEADS DEVICE
- 简易毛巾绣装置
EASY TOWEL DEVICE
- 雕孔装置
BORING DEVICE
- 激光切割装置
LASER CUTTING DEVICE
- 自动化设备
AUTOMATIC EQUIPMENT


ADDITIONAL DEVICE

附加装置

金片绣装置 SEQUIN DEVICE


- 创新设计，移动式金片装置，可实现面线与金片颜色同色；
- 稳定绣作速度可达1000针/分钟；
- 通过简单调节，无需切换针位，可实现多达12色，不同尺寸，不同形状的效果；
- 单金片/叠片/四金片/六金片/八金片/十二金片/移动式金片装置可选。
- Creativity design, movable type sequin device , make upper thread color same as sequin color.
- Practical running speed up to 1000 on 2/3/4 mm sequin.
- Easy sewing of up to 12 sequin on one needle position without color change and all shapes of sequin.
- Single /twins/four/six/eight/twelve/movable type twins sequin is available.

珠片尺寸由 2mm 至 22mm, 灵活选用不同形状大小颜色的珠片
Sequin in diameter of 2-22mm are applicable. wide range of sequin size or sequin shapes or sequin color .

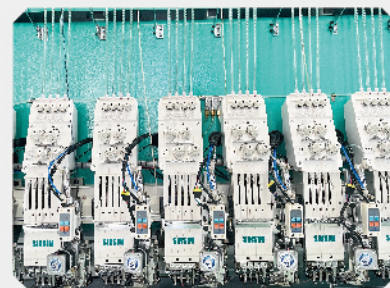

简易绳绣装置 EASY CORDING DEVICE


- 结构简便，安装灵活，性价比高；
- 可支持1-5mm 直径的各种绳、带；
- 效率高,稳定绣作最高转速1200转；
- 双色简易绳绣， 三色简易绳绣装置可选；
- 独立结构自动剪绳结构可选。
- Simple structure,flexible installation and high performance-price ratio.
- More compatible to run cord and rope of diameter of 1-5 mm.
- High efficiency and stable embroidery with the max speed at 1200RPM.
- Twins color easy cording device , triple color easy cording device is available .
- Independent structure automatic trimmer cording device is available.

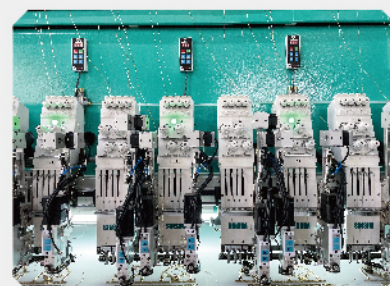

珠子绣装置 BEADS DEVICE

- 通过功能件的简单更换，可绣做2mm/2.5mm 直径的各种形状散珠，也可以实现3mm/4mm 珠管，3mm/4mm 泡珠的绣做；
- 智能送料系统，可敏锐检测送料状态，保障绣做完美；
- 稳定绣做速度可达850rpm；
- 盘珠/散珠/一珠双金片/双珠双金片/三珠双金片装置可选，实现单色，双色，三色，多色珠绣，多色珠绣叠加金片绣效果。


- Compatible easy sewing of various size of loose glass beads of 2/2.5mm, and pipe of 3/4mm, pearl of 3/4mm. just by changing few simple parts and fast setting.
- Smart sensor and warning system to detect beads feeding status, no bead is missing, but always continuous stitching of beads.
- Maximum practical running speed at 850rpm for working on 2/2.5mm loose beads.
- Tray type/scattered type/single bead double sequin device is available. Can be make single/dual/multi-color beads embroidery design.
- Dish type /disperse type/single beads+twins sequin/twins beads+twins beads/triple beads+twins sequin device is available. Can be make single /dual/triple/multi color beads and beads plus sequin embroidery design .

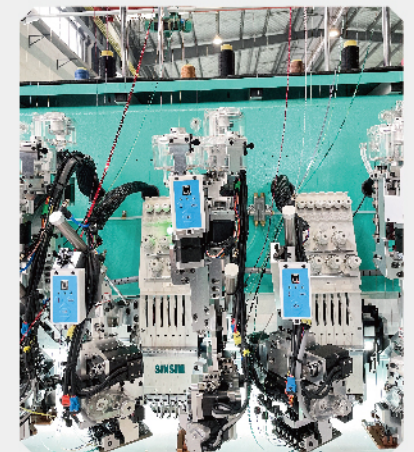

简易毛巾绣装置 EASY TOWEL DEVICE

简易毛巾装置通过气阀升降调整摆杆的相对位置，摆杆配合压脚及针杆的升降形成简易毛巾的线迹。装置安装简单便捷，高性价比的简易毛巾机型广泛应用于服装、鞋帽、装饰等加工领域，具有广阔的市场前景，拓展了锁式绣的组合范围，为花样的设计打开了想象的空间。


The simple towel device adjusts the relative position of the pendulum through the lifting of the valve. Pendulum with the presser foot and needle bar movements to form a simple towel stitch. Installation simple and convenient, cost-effective simple towel models are widely used in clothing, shoes and hats, decoration and other processing areas. It has a broad market prospects, expanding the range of the combination of chain stitch embroidery, opening the imagination of the space for the pattern design.

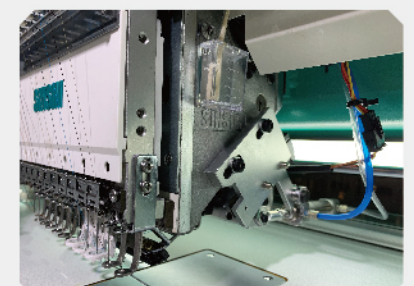

ADDITIONAL DEVICE

附加装置


雕孔装置 BORING DEVICE

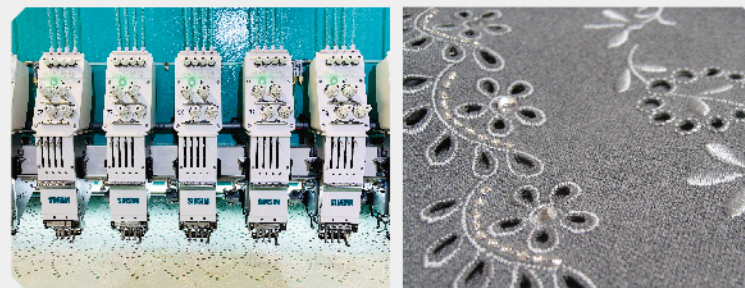

- 雕孔绣又称镂空绣，是在绣制过程中，按花纹需要刺雕出孔洞，并在孔洞里或边以不同方法绣出多种图案组合；
- 可选用雕孔针，雕孔刀以及独立雕孔装置，其中独立雕孔速度快，声音轻。

- Boring embroidery also known as hollow out embroidery according to patterns need to carve out holes, and in the hole or side with different methods to embroider a variety of patterns in the embroidery process.
- Hole-carving needle, hole-carving knife and independent hole-carving device are available. Particularly recommended fast speed and light sound independent hole-carving device.

激光切割装置 LASER CUTTING DEVICE

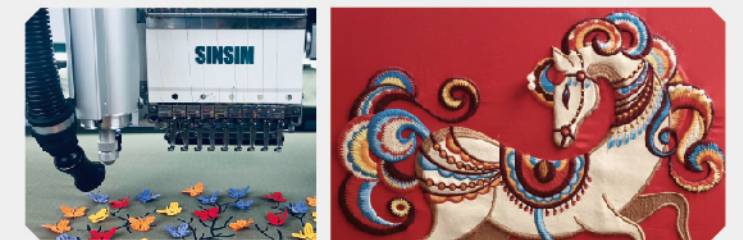


- 适合在成衣衣片、面料、玩具、针织品、皮具、家纺、布艺装饰各种成分面料上进行绣花、切边、打孔、贴布绣、镂花、分层切割；
- 光纤柔性传输更安全稳定，操作简便，运作速度快，丰富刺绣工艺，提升绣品附加值；
- 可一次完成绣花和切割工艺，包括局部镂空、贴布绣分层切割。

- Designed for engraving, layer cutting, boring, patch/applique embroidery on wide range of fabric, leather, mesh, toy, textile.
- Hybrid of embroidery and compact laser cutting and engraving largely reduces down time of post embroidery processing and adds unlimited value and charm to the products.
- CO₂ laser optical fiber computerized embroidery machine can complete embroidery and cutting at one time, including partial hollowing out, appliqué and layered cutting.

自动化设备 AUTOMATIC EQUIPMENT



自动夹框装置
Automatic Frame Clamp Device

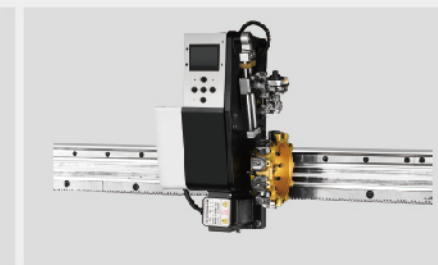

自动换底线装置
Automatic Bobbin Changer Device



自动送卷布装置
Automatic Fabric Feeding Device

